



edge
Technology
Excellence | Empower | Enhance

 **MATRIX**®
SECURITY SOLUTIONS

Researched, Designed &
Manufactured in
INDIA
50+ Countries | 1M+ Customers




Matrix IP Camera Family

Agenda

- Key Benefits
- Camera Details
- Technical Specifications



3-Dimensional Benefits of Matrix Video Surveillance

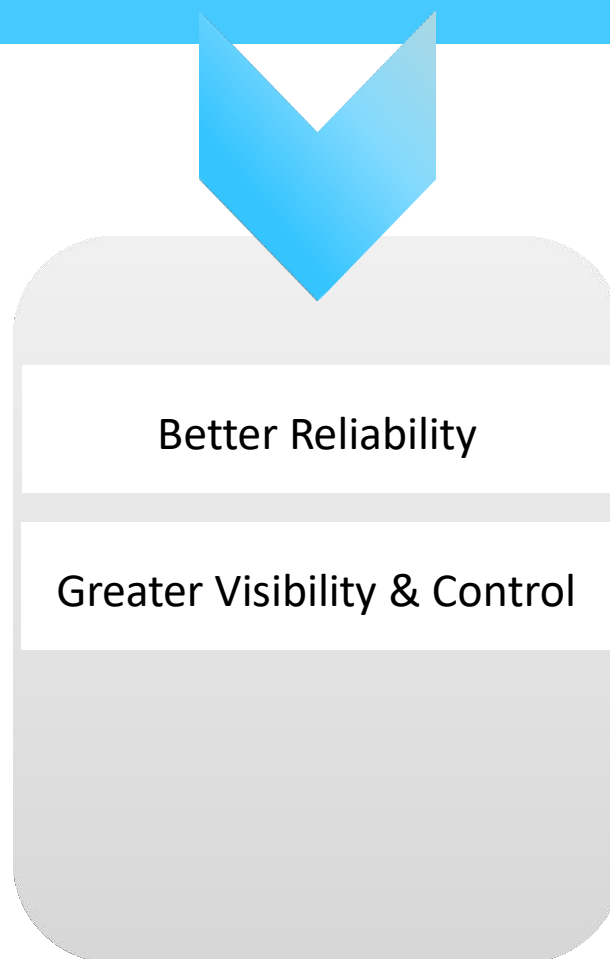

Matrix SATATYA Key Benefits

- Better Video Quality
- Bandwidth and Storage Optimization
- Intelligent Video Analytics



Better Video Quality



Exceptional Low Light Images



Consistence Performance



Greater Coverage

Low Light Performance

- Exceptional Performance during Challenging Lighting Conditions
- Color Images even at 0.01Lux
- Reduced Noise in video footage due to sensor design
- New Age ISP pipeline design and tuning



*Sony STARVIS
Series Sensors*




MATRIX



OTHERS

Technology

- Powered by Sony STARVIS Low-light Sensor
- Back-illuminated Sensor with No Internal Reflection, Hence Reduced Noise
- Higher Photon Absorption Capacity - Exceptional Low Light Performance

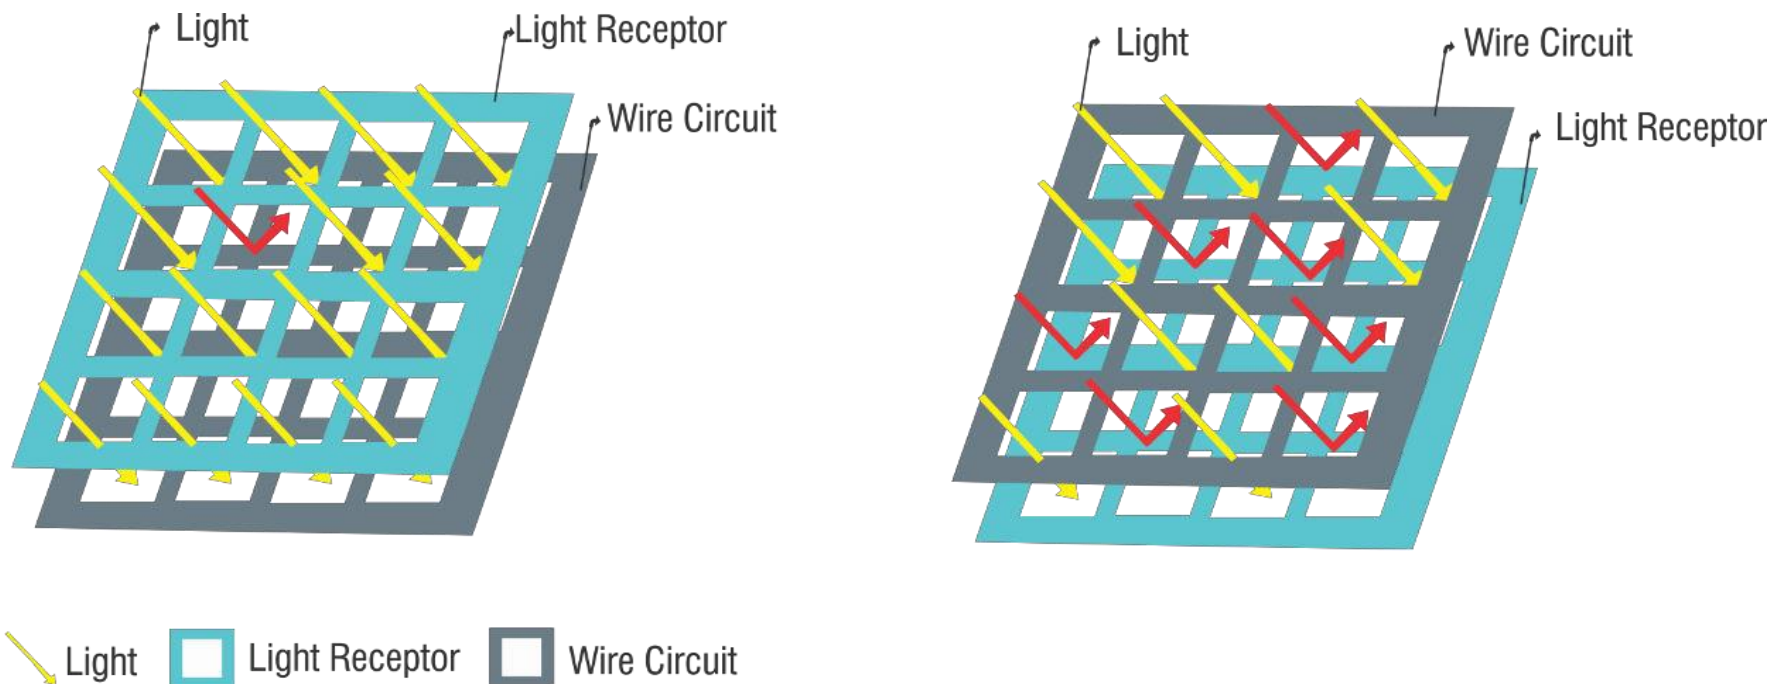

Consistent Performance

- Smartly Varies Difference in Light Levels in an Image
- Rectifies Over-exposed and Under-exposed Areas
- Clearer, Detailed Images



True WDR



MATRIX
TRUE WDR ON
(120dB)





OTHERS
DIGITAL WDR
ON (90dB)


Technology

- Captures Varying Lighting Conditions
- Takes Two Snaps:
 - Slow Shutter Speed - For Dark Areas
 - Fast Shutter Speed - For Bright Areas
- Combines Them into One Image

Slow Shutter Speed Picture

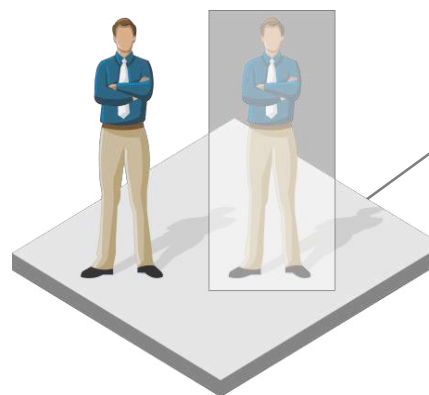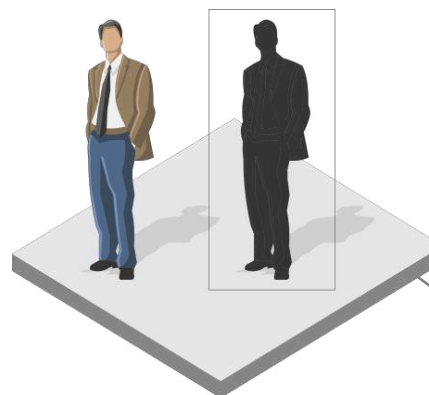

Fast Shutter Speed Picture

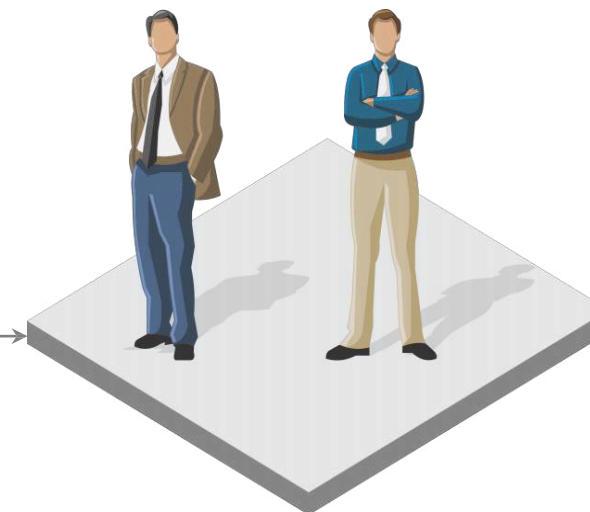

Combined Picture

Greater Coverage

- Covers Large Area to Provide a Wider Field of View
- IP Camera 2.8mm Lens: FOV 107°
- IP Camera 3.6mm Lens: FOV 87.5°
- IP Camera 6mm Lens: FOV 57°
- IP Camera 2.8-12mm Lens: FOV 98°-33°



Higher Field Of View

FOV 90°



MATRIX

FOV 82°



OTHERS

Technology

- Field of View: Area Covered by Camera
- Depends on Camera and Lens
- Smaller the Focal Length, Wider the Field of View



2.5 mm



3.6 mm



4.3 mm



6 mm



12 mm



25 mm


Smart Optimization

- Camera Initiation
- Latest Compression Technique
- Optimized Storage & Bandwidth
- Onboard Storage Support (512GB)




Camera Initiation

- Camera Initiation is a Matrix proprietary feature
- The IP Camera initiates the request to connect to an NVR or VMS
- The server does not require to know the IP address of the camera
- Reduces unnecessary hassle for developing a complicated network architecture
- Simplifies the installation and maintenance procedures

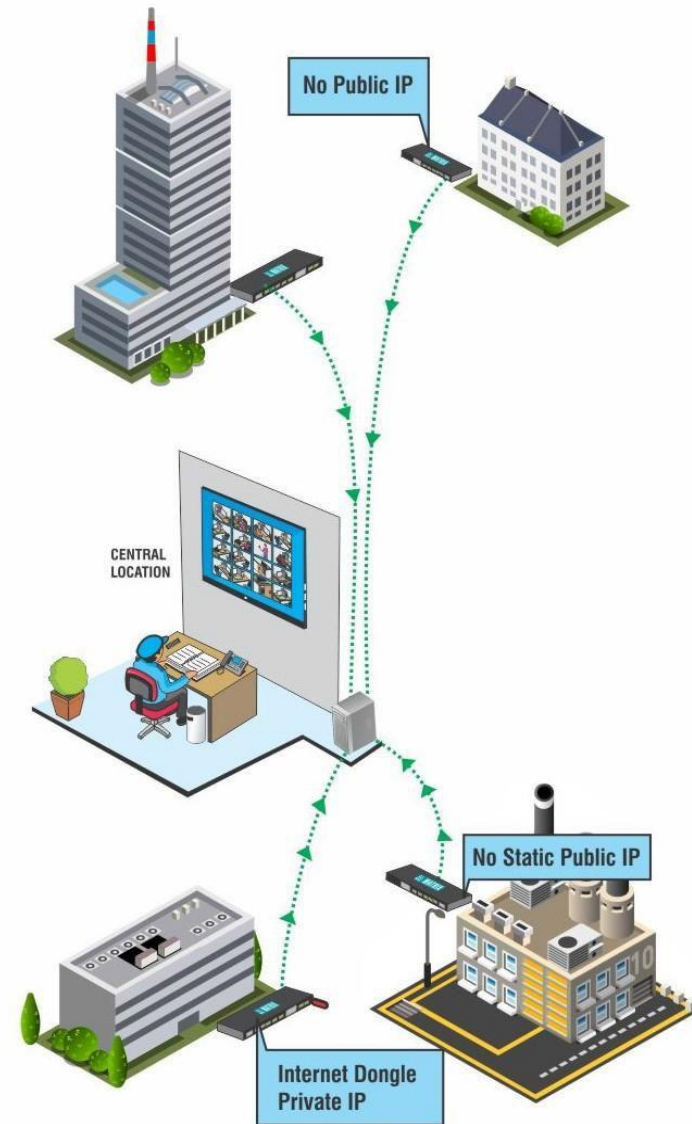

Compression Technique

- Save 50% on bandwidth and storage

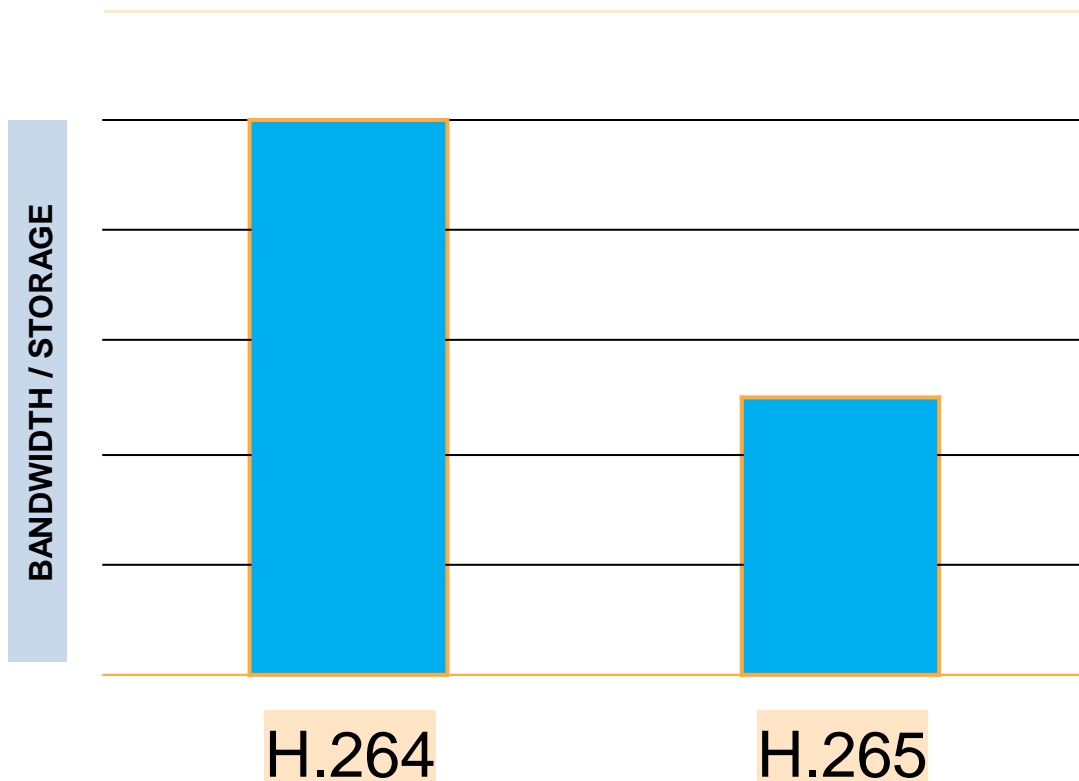

Bit-rate:1300Kbps



MATRIX

Bit-rate:2500Kbps



OTHERS

Technology

- H.264:
 - The video frame is divided into equal number of pixels
 - It is irrespective of the region information of the adjacent pixels
 - H.264 supports 16 x 16 pixels macro block which is 25% of H.265
- H.265:
 - One pixel compares itself to its adjacent pixels
 - The ones having similar information get bundled up as one pixel
 - The compression technique of H.265 is almost double of H.264
 - In terms of interface prediction, H.265 is more descriptive
 - In terms of direction, the image can be compressed in 33 directions of motion



OTHERS



MATRIX

Optimized Storage

- Automatic Bit-rate Reduction during No Activity Period



Adaptive Streaming

Bit-rate: 800kbps ; Fps:15fps



MATRIX


Bit-rate: 2500kbps ; Fps:25fps



OTHERS

Technology

- Automatically Reduces Frames/Second based on the Activity in the Region.
- Saves Storage Cost, up to 40%

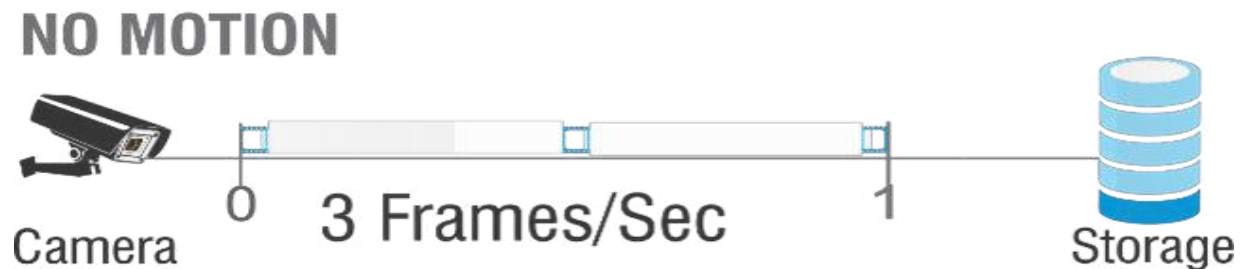

Optimized Storage

- Divides a Single Stream into Multiple Bitrates based on its Importance



Smart Streaming



MATRIX



OTHERS

Technology

Bandwidth: 500kbps



Bandwidth: 1400kbps


Bandwidth: 900kbps

Optimize Bandwidth

- **Region Of Interest:** Streaming and Recording of only critical areas
- **Four Stream Support:** Different Streams for Viewing, Storing and Recording



Region Of Interest

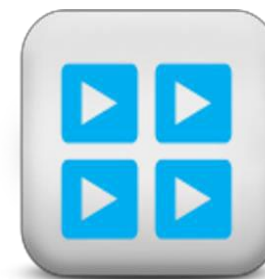


Four Stream Support

Onboard Storage

- Edge Recording-Up to 512GB





SD Card Support

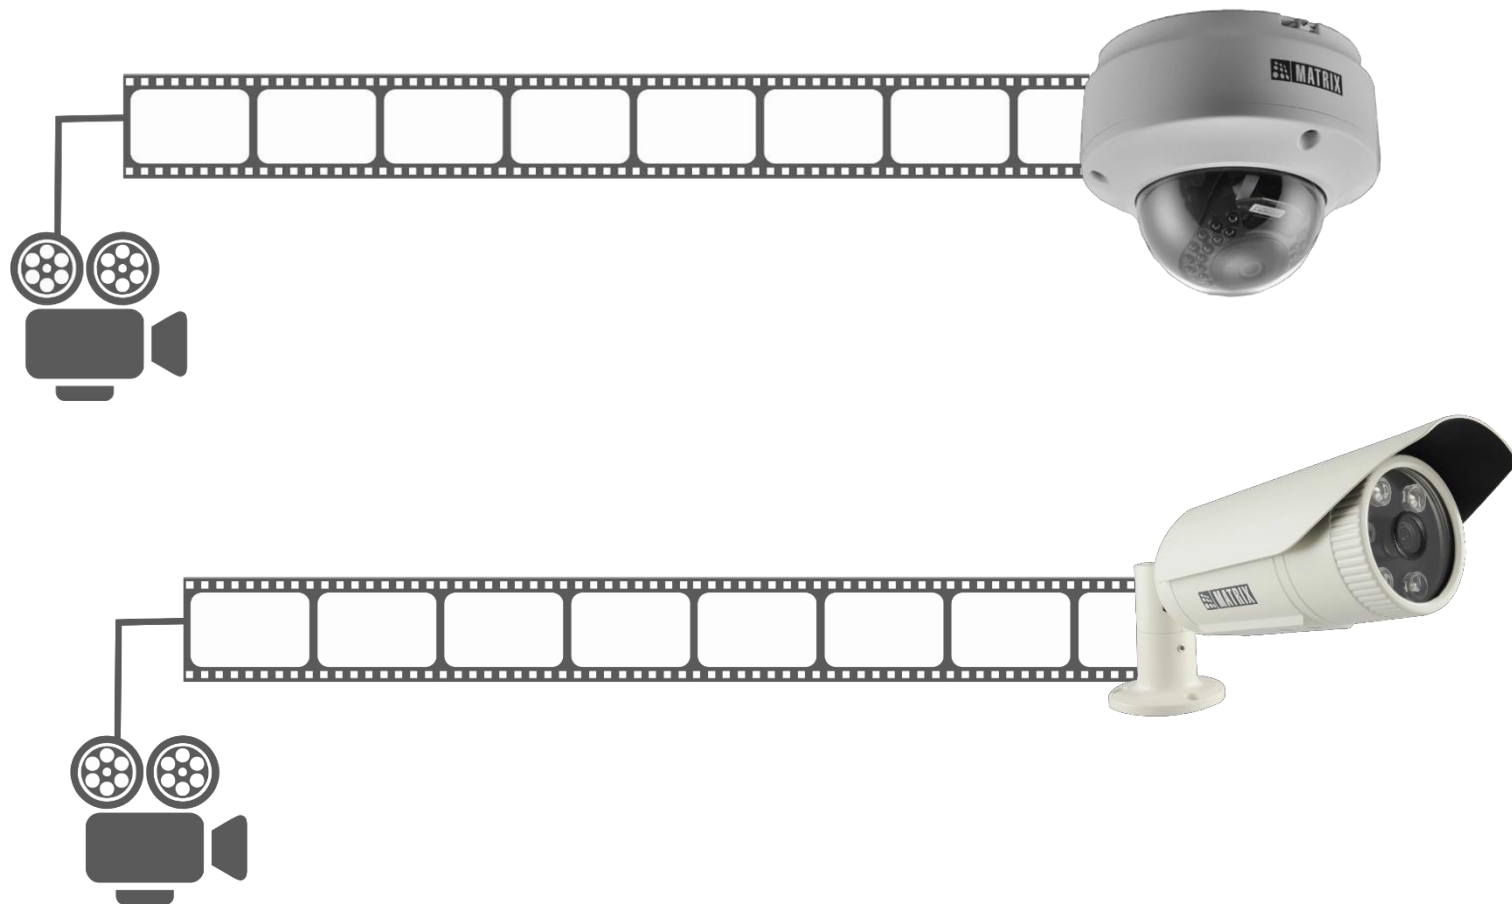

Intelligent Video Analytics

- Motion Detection
- Intrusion
- Trip Wire

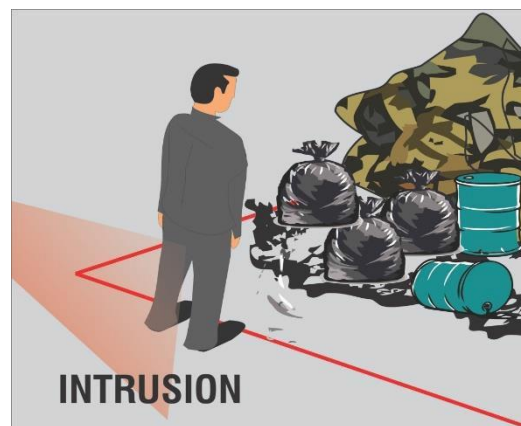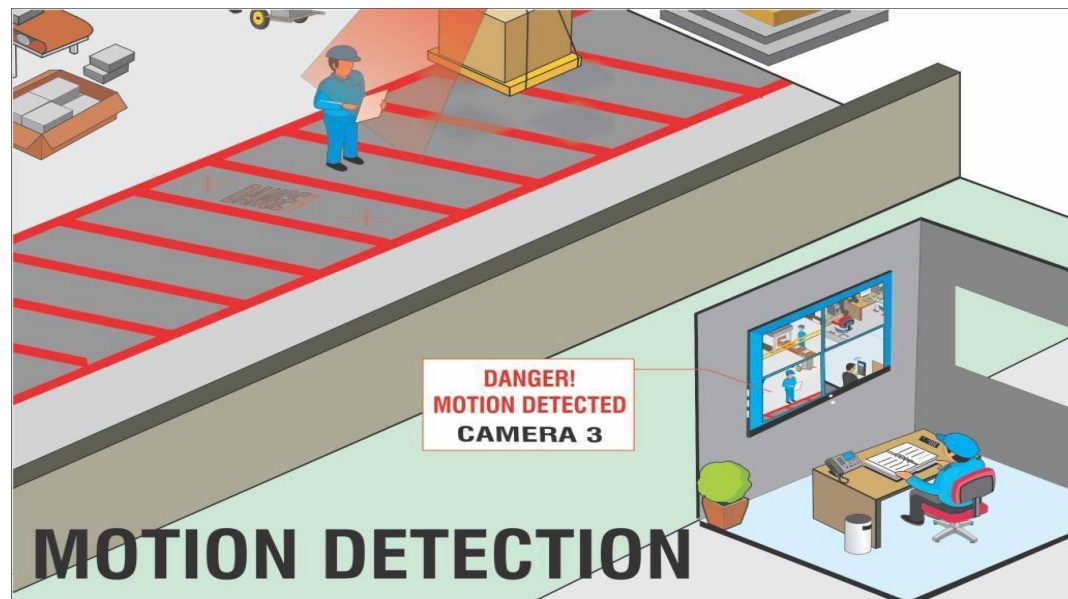


Motion Detection

- Mark Critical Areas where Motion is Prohibited.
- Sends Instant Notification on Motion Detection




Intrusion Detection

- Mark virtual box where Intrusion is Prohibited
- Sends Instant Notification on Entry or Exit
- Provides Safety
- Retains Secrecy

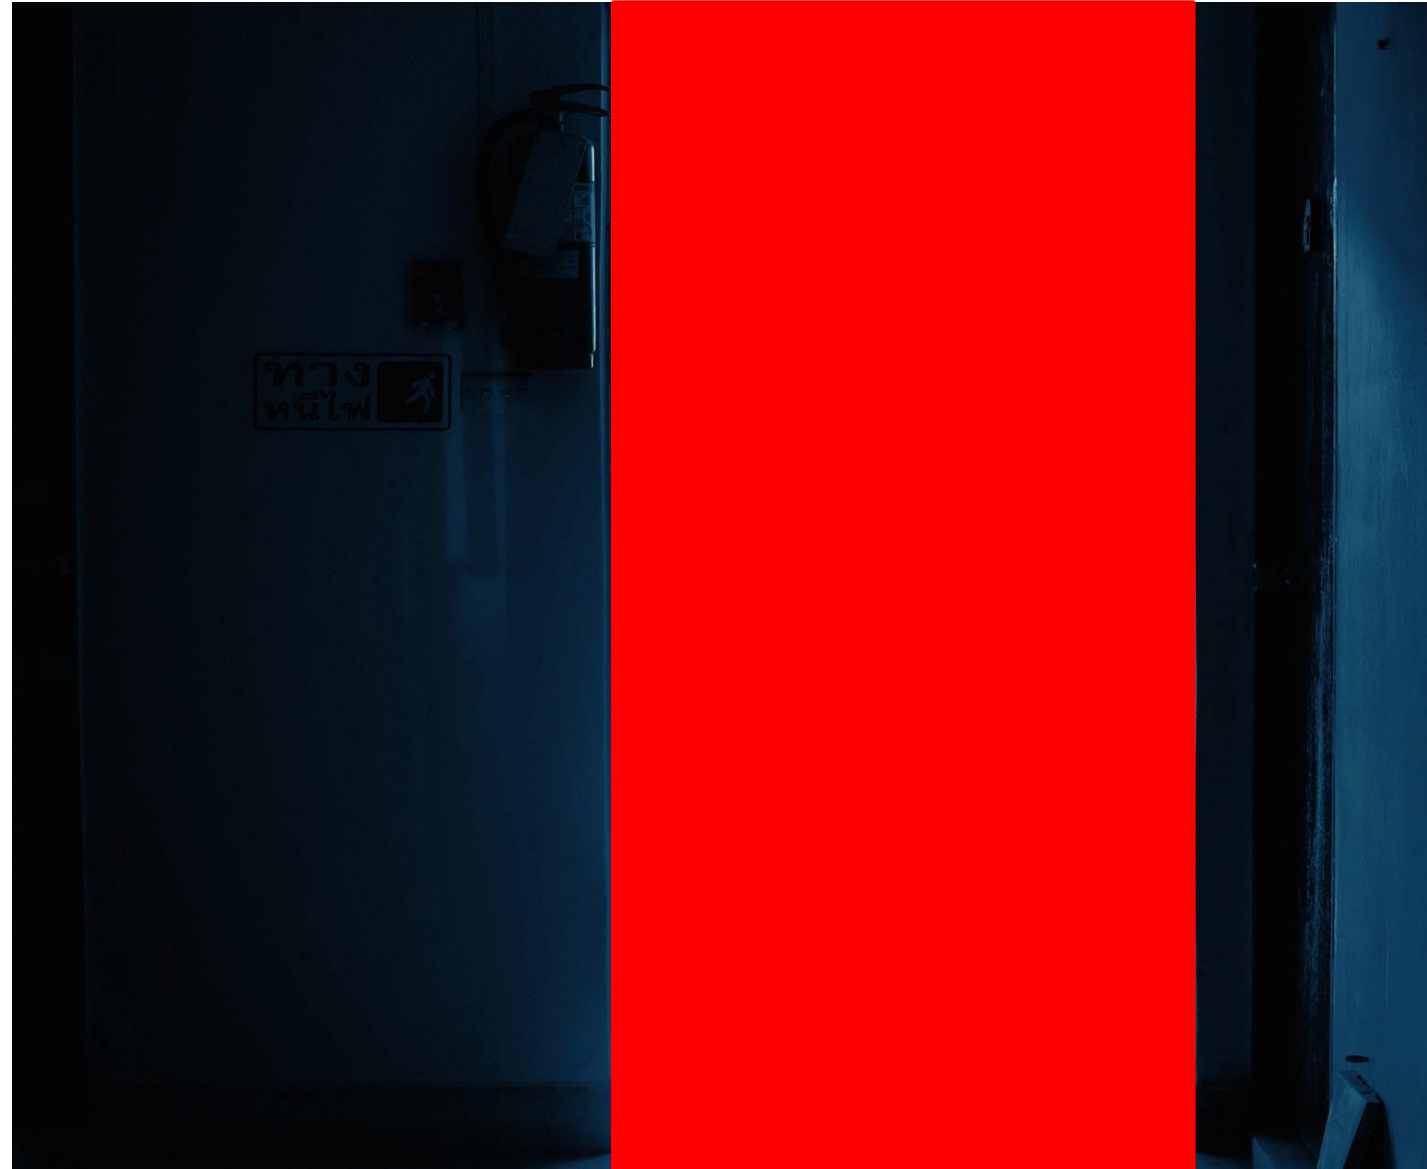

Trip Wire

- Identifies Motion Over a Defined Virtual Line
- Perimeter Security by Virtual Fencing

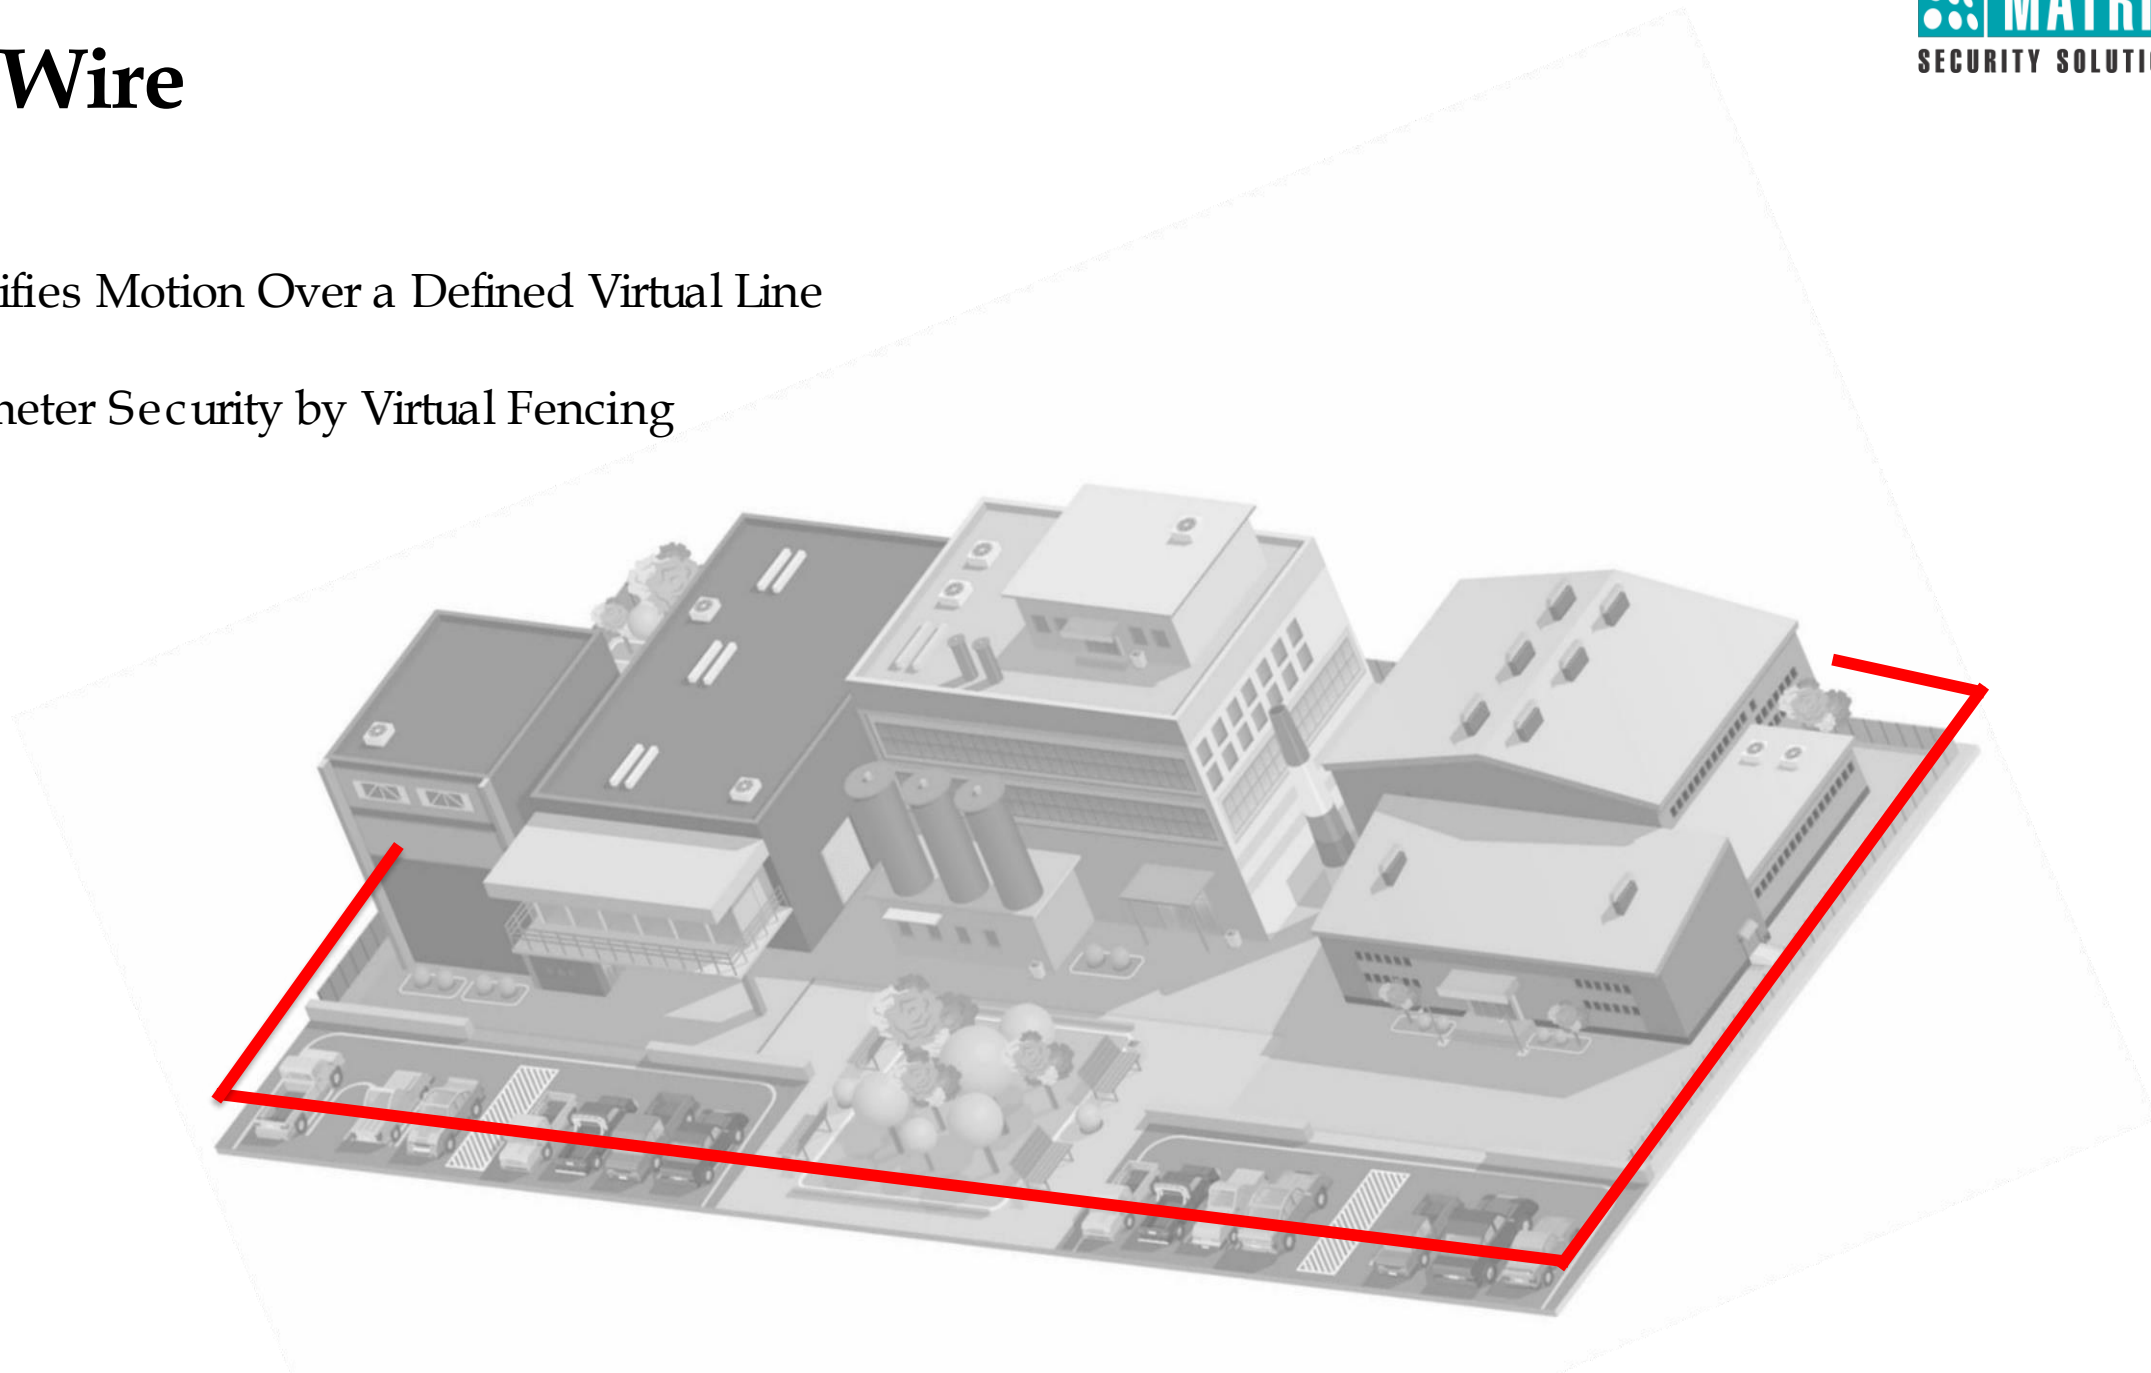

Alerts



Snapshot Schedule



Email With Snapshot



Pre/Post Alarm Recording



Upload Image/Clip



SMS

Events




Network Disconnect



IP Conflict



Storage Alert

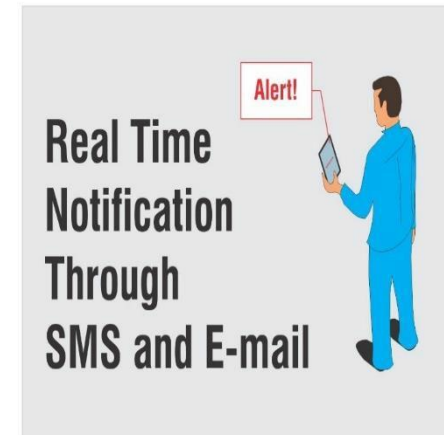

MATRIX



OTHERS

Reliability


- Industrial grade ADC enclosure for better thermal management and endurance
- Superior optical elements like aspherical lenses from curved or 3 pieces glass designed for enhance image capturing
- Camera initiation – No static IP required




Rugged Construction



PRODUCT RANGE (BULLET IP CAMERA)

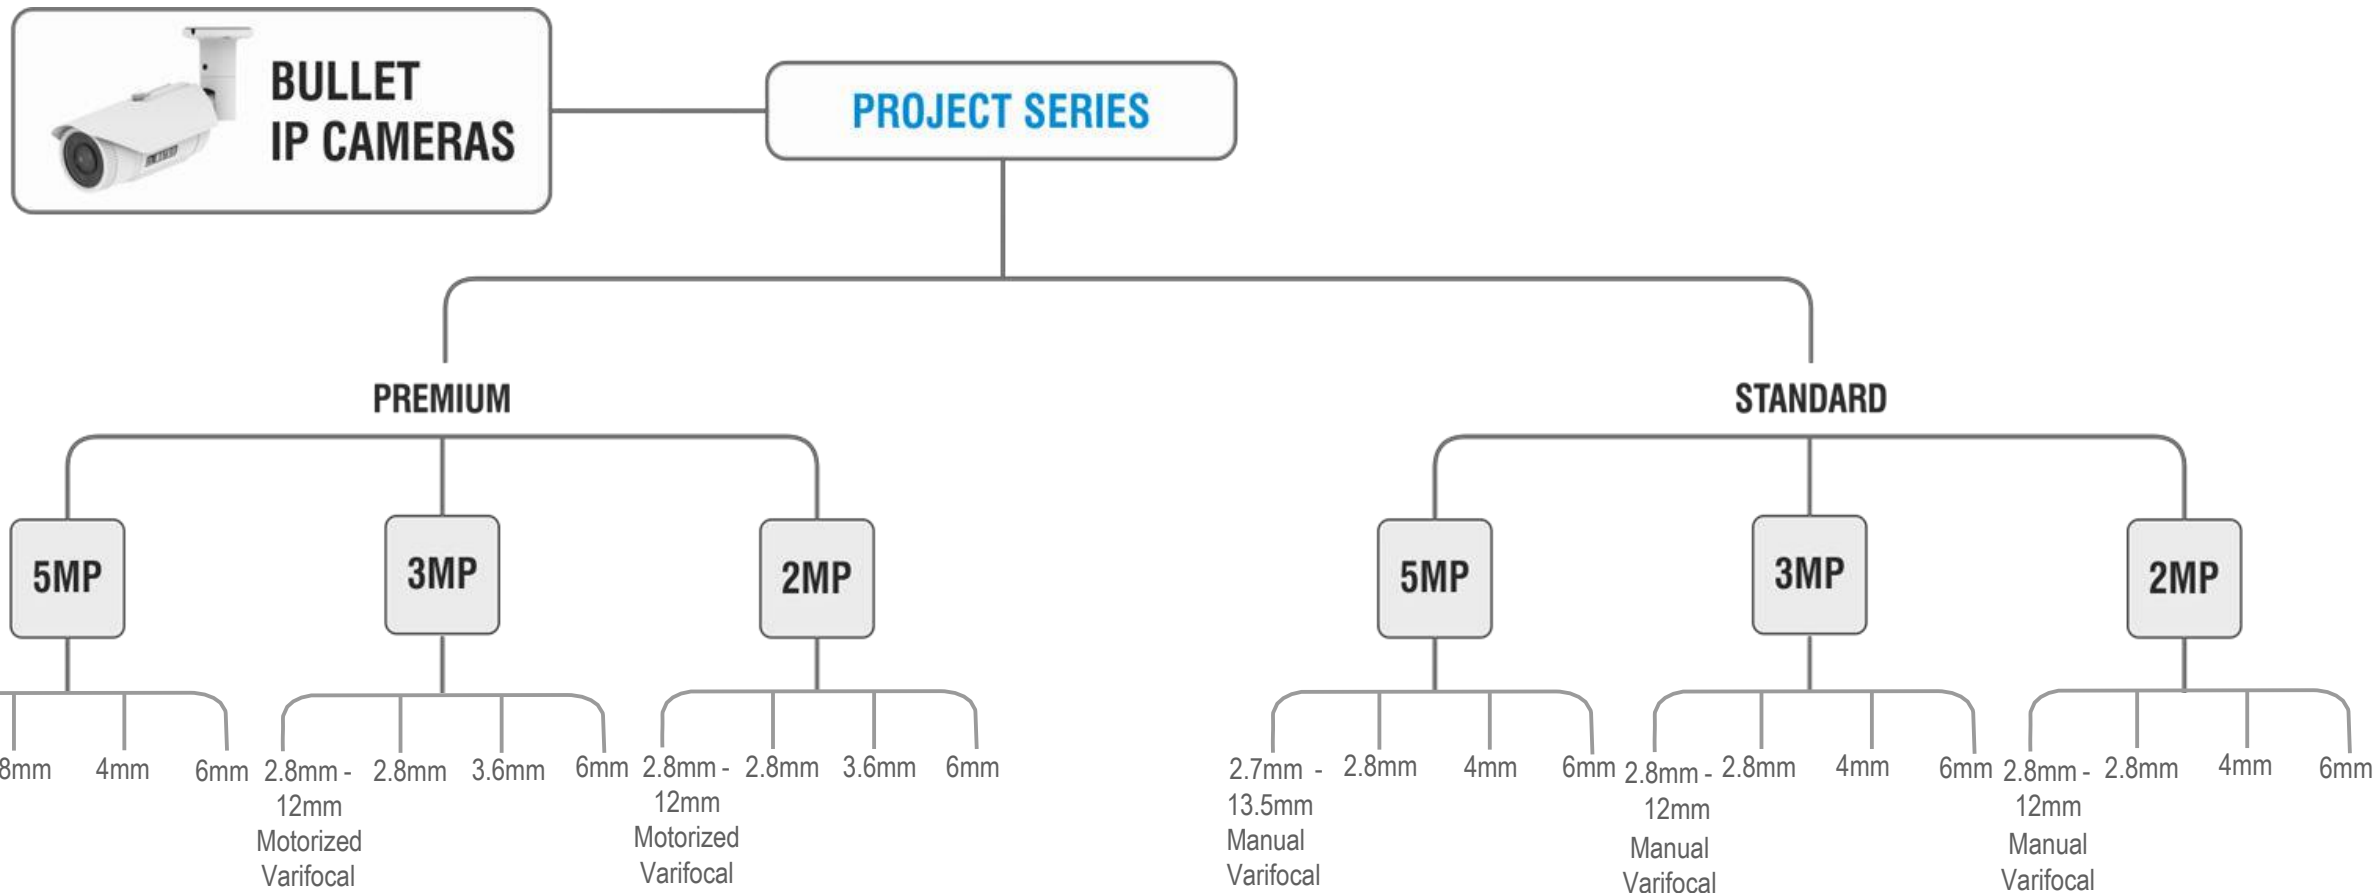

PRODUCT RANGE (BULLET IP CAMERA)

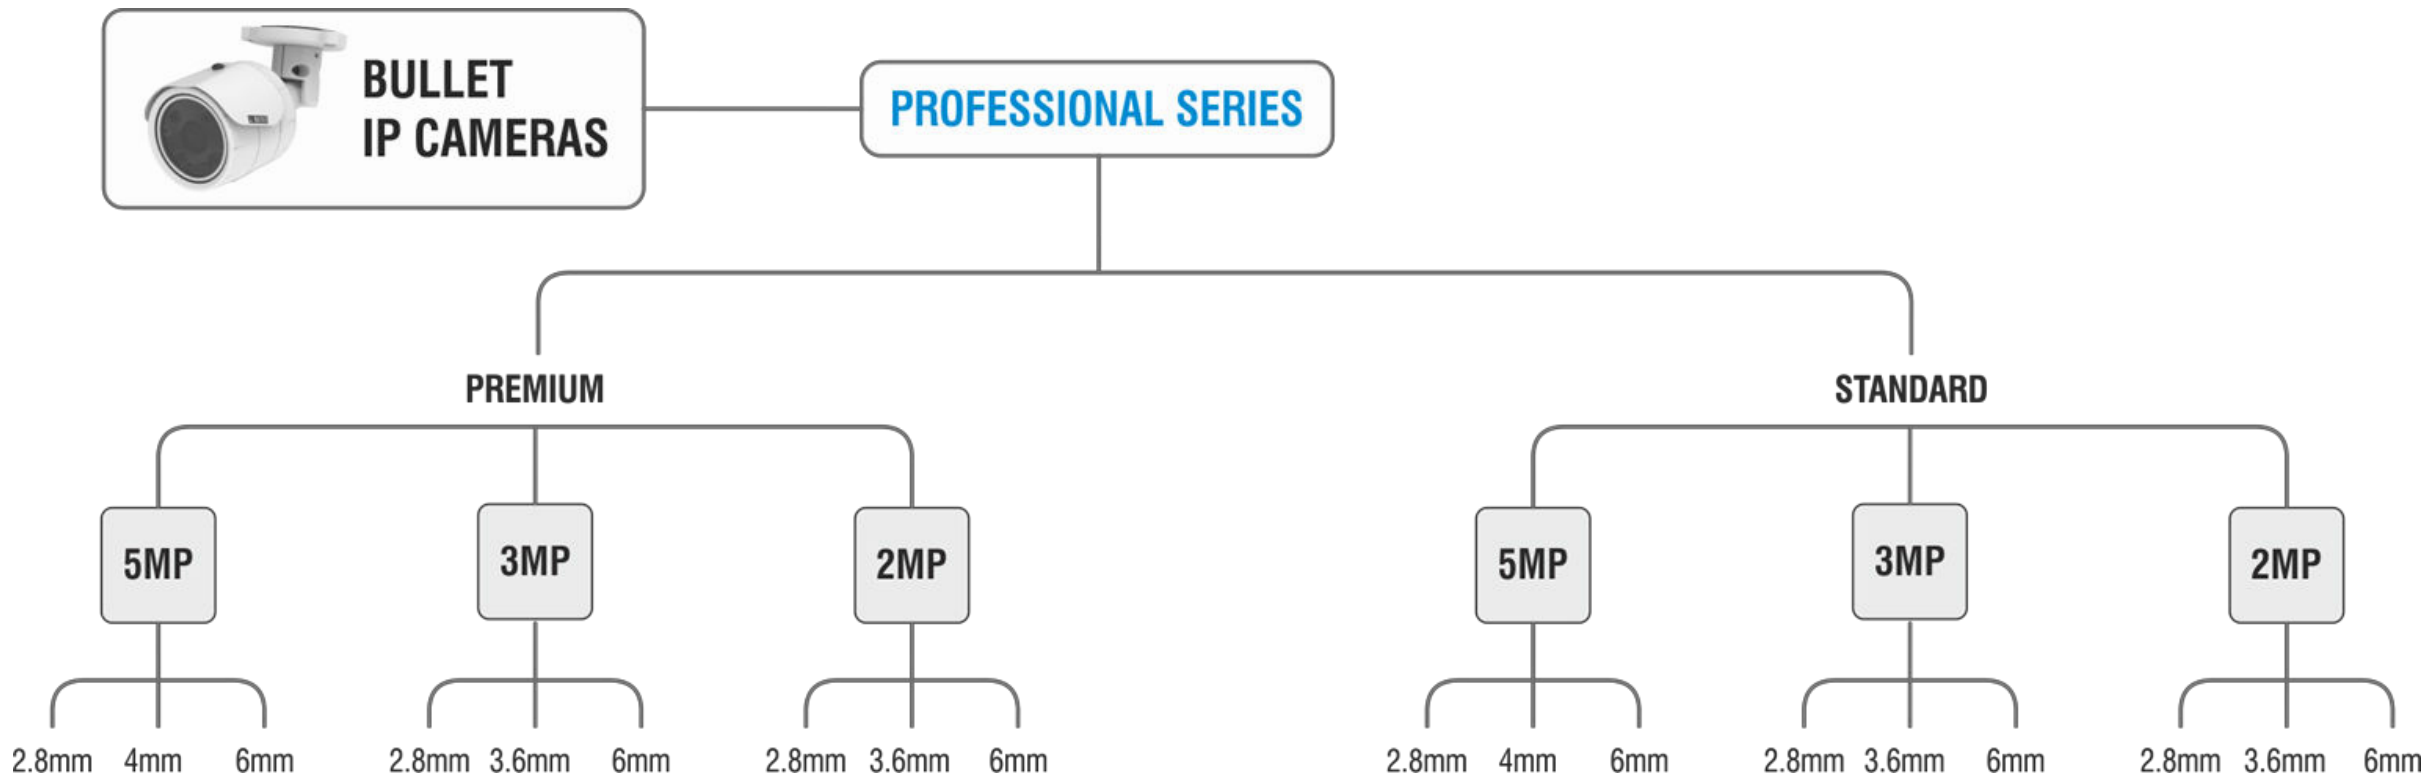

Technical Specifications

| | |
|----------------------|--|
| Sensor Type and Size | 1/2.8" SONY - CMOS 5/3/2MP Active Pixel Progressive Scan, Back Illuminated Image sensor (STARVIS Series) |
| Minimum Illumination | Color - 0.01 Lux @F1.2 (For Fixed Variants) Color - 0.01 Lux @F1.4 (For VL and MVL variants) |
| | Color - 0.001 Lux @F1.5 (For PTZ Variant) Monochrome - 0 Lux |
| Focal Length | 2.8mm/3.6mm*/4mm/6mm/2.8-12mm/2.7-13.5mm |
| Focus Range | 0.3m to infinity |
| Field of View (FOV) | HFOV - 50° to 113° |
| Lens Mount | M12 for Fixed, D14 for MVL and VL |
| Focus | Fixed, Varifocal, Motorized Varifocal |
| Aperture (F#) | F 1.2 -3.2 |
| Iris Type | Fixed, P Iris |
| IR Range | 30m/ 50m |
| IR Led Wavelength | 850nm |
| IR Switching | Auto/ Manual |
| Audio in | 1 (for premium variants only) |
| Audio out | 1 (for premium variants only) |
| Two-way Audio | Supported |
| Alarm in | Yes* |
| Alarm Out | Yes* |

| | |
|---------------------------|---|
| Audio Compression | G.726 and G.711 μ |
| SD Card | Up to 512GB |
| Camera Adjustment Angle | Pan: 0° up to 360° |
| | Tilt: 0° up to 180° |
| | Rotate: 0° up to 360° |
| No of Stream Profiles | 3/4 |
| Available Resolutions | 2592x1944, 2592x1520, 2048x1536, 1920x1080, 720p, D1, 2CIF, VGA, CIF, QCIF* |
| Max Resolution | 2592 x 1944 |
| Bitrate | 128kbps- 16Mbps* |
| Bitrate Type | CBR, VBR |
| Video Compression | H.265, H.264, MJPEG |
| Frame Rate | 1-30fps |
| Shutter Speed | 1/25s-1/59000s* |
| Adaptive Streaming | Yes |
| ONVIF Conformance | Profile S and G |
| Alarm Recording | Pre and Post |
| Edge and Motion Recording | Yes |

| | |
|---------------------|---|
| Video Parameters | Snapshot, Region of Interest (ROI), BLC, Day/Night Settings |
| Privacy Masks | 3 |
| WDR | True WDR (120dB) |
| SNR | Maximum 73db |
| Image Enhancement | Rotation/Saturation/ Contrast/ Sharpness/Brightness/Hue/ White Balance |
| DNR | 2D &3D |
| Video Analytics | Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, Audio Exception*, Missing/ Suspicious Object Detection*, Object Counting*, Loitering Detection* |
| IP Conflict | Yes |
| Network Disconnect | Yes |
| Storage Full | Yes |
| Upload Image | SD, NAS, FTP |
| Upload Clip | SD, NAS, FTP |
| Notifications | E-mail, SMS, TCP |
| Supported Protocols | TCP/IP, HTTP, ARP, DSCP, QoS, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP,IGMP, 8021x, SNMP |
| Web Viewer | Supported in IE 8.0 – 11.0, Firefox 15.0 – 47.0, Chrome 20.0 – 54.0 |

| | |
|-------------------------|--|
| Plugins | IE: Matrix ActiveX |
| | Chrome: VLC plugin(2.0.4) and Quicktime (7.7.5) |
| | Mozilla: VLC Plugin(2.0.4) and Quicktime (7.7.5) |
| Power Supply | 12V (DC); 802.3af (PoE) |
| Power Consumption | <7W |
| Operating Humidity | Less than 90% RH (non-condensing) |
| Operating Temperature | -20°C to 60°C |
| Storage Temperature | -20°C to 60°C |
| Communication interface | 10Base-T/100BaseTX Ethernet (RJ-45) |
| Colour | Pantone 7527C |
| Storage | NAS, SD Card |
| Certifications | BIS, CE, IP66, IP67*, FCC Part-15 Subpart -B, ONVIF S & G, IK10, UL* |

Note: Values of parameters may differ from variant to variant

THANK YOU!



edge
Technology
Excellence | Empower | Enhance

www.edgetechnology.in